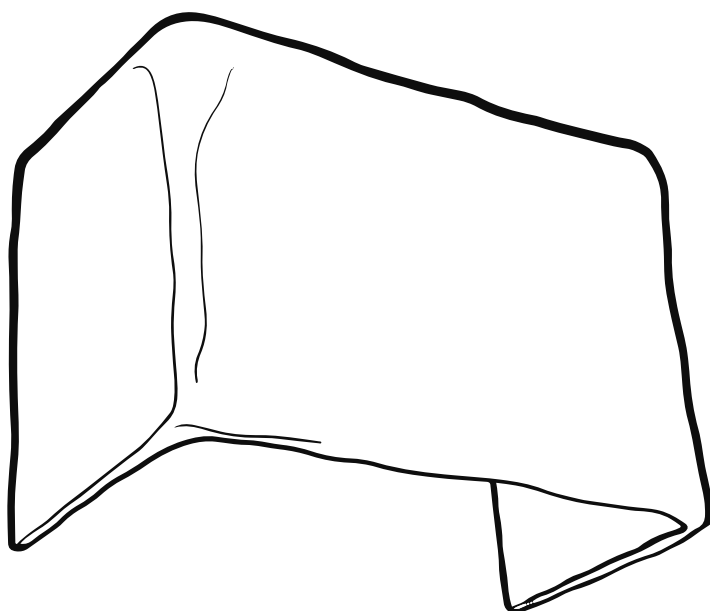# stem.

SCAPE WALL LIGHT
INSTALLATION MANUAL

(For use in India only)

⚠ **CAUTION**

BEFORE INSTALLATION

Please read and understand the provided step by step instructions thoroughly before proceeding with the installation. By taking these precautions and diligently following the provided guidelines, you will achieve a secure and successful installation.

1. Always remember to turn off the power supply to the circuit before commencing any installation work. Electrical installation tasks should exclusively be undertaken by an authorized electrical contractor. For professional guidance, please contact your local electricity authority.

2. Before installation, check the installation area for the presence of any other cables to prevent damage to concealed wiring.

3. When positioning the light fixture, ensure that the chosen area can adequately support the weight of light upto 2kg (4.5 lbs, aluminium)/ 3kg (6.6 lbs, brass, darkened brass).

4. Please note that this fixture is designed for use in dry domestic indoor environments only.

5. Before installing or changing a G9 bulb, it's essential to switch off the mains power and allow the lamp to cool.

6. When handling the metal fixture, ensure your hands are clean. It is advised to wear gloves to avoid leaving marks on the metal surface.

CARE INSTRUCTIONS

Ensure your hands are clean before touching the metal surface to avoid leaving any fingerprint marks. It is advised to use gloves when handling the lighting fixture. Do not use any abrasive substances on the product. Please be wary of its weight. Handle with care.

Over time, the metal surface may diminish its original luster. To retain the original aluminium or brass finish, use metal polish with a soft, dry cloth and gently rub it onto the surface. Please refrain from using any polish on the darkened brass finish, as this may result in the removal of the patina. Use a dry cloth to remove dust occasionally.

stem.

TECHNICAL DETAILS

Dimensions
W160 H120 D90 MM
W6.3 H4.7 D3.5 IN

Weight & Material
1 kg - Aluminium
2 kg - Brass
2 kg - Darkened Brass

Classification
IP20

Light source
G9 LED bulb (Incl.)
2.6W, 220-240V

Lumen
320lm

Kelvin Rating
2700K

Dimmable
On request, 3.5W

Hardware
W146 H55 D22 MM
W5.7 H2.2 D0.9 IN
Stainless steel
Cord - Hardwire

## INSIDE THE BOX

Wall
Plug X 2

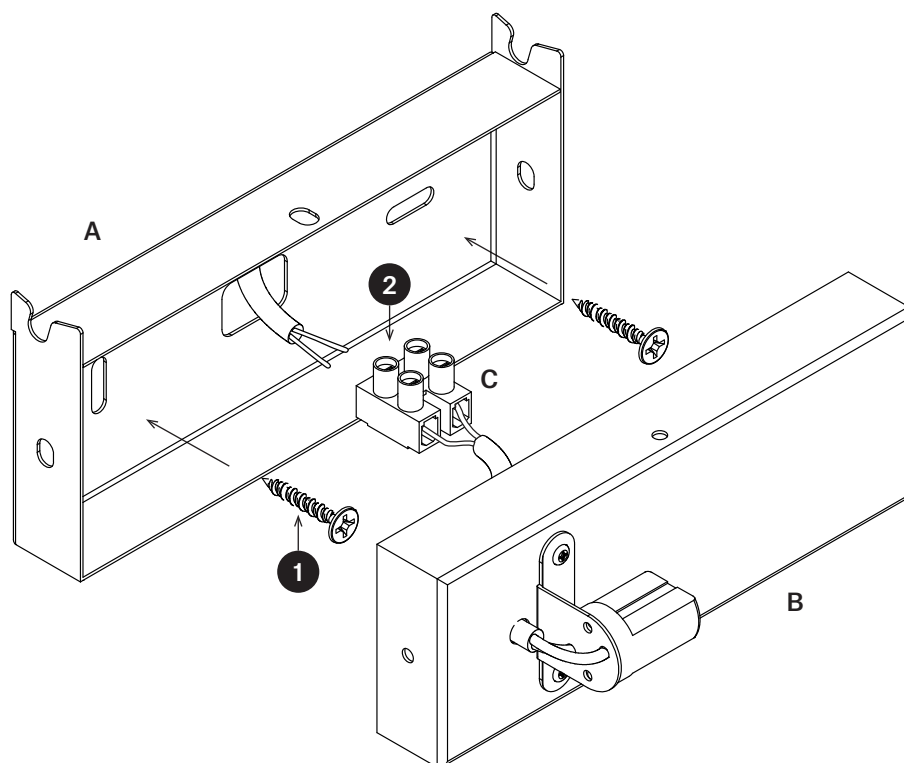Dry Wall
Screw X 2

G9 Bulb
X 1

Gloves pair
X 1

Canopy casing
with Diffuser X 1

Scape light
shade X 1

stem.

NOTE : Before proceeding with the installation, unscrew the canopy screws to disassemble the canopy casing with diffuser.
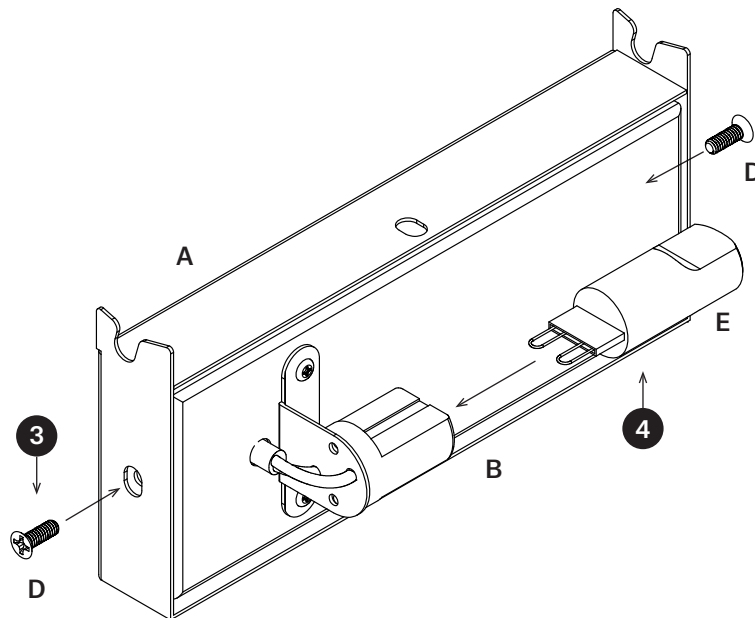

(Fig. 1)

STEP 1
Position and install the Back plate

Mark where you want to mount the light fixture, drill the wall plugs and pull out the electrical connection point from the back plate. Tighten the drywall screw on the back plate (A) of the canopy casing.

STEP 2
Connect the wiring

Take the electrical connection and connect both ends of the wire to the wire connector (C) on the back of the top canopy casing (B).
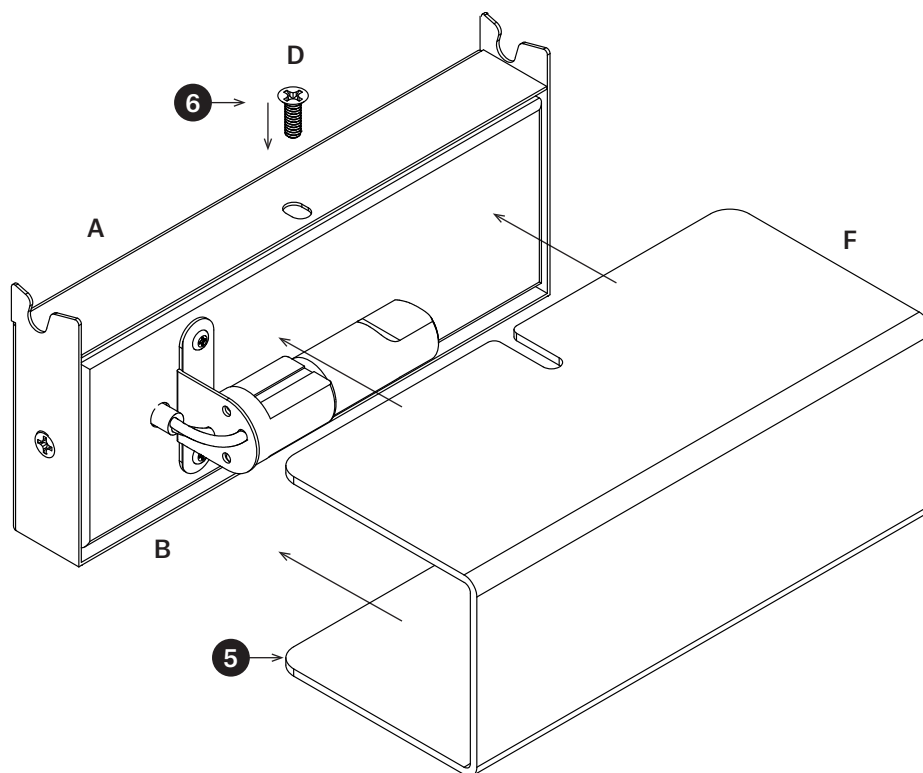
stem.

(Fig. 2)

STEP 3
Attach the top Canopy casing

Attach the top canopy casing (B) to the back plate (A) and secure it by tightening the canopy screw (D) on both ends.

STEP 4
Install the Bulb

Insert the G9 bulb (E) into the bulb holder on the top canopy casing (B). Test the connection and move on to the next step.
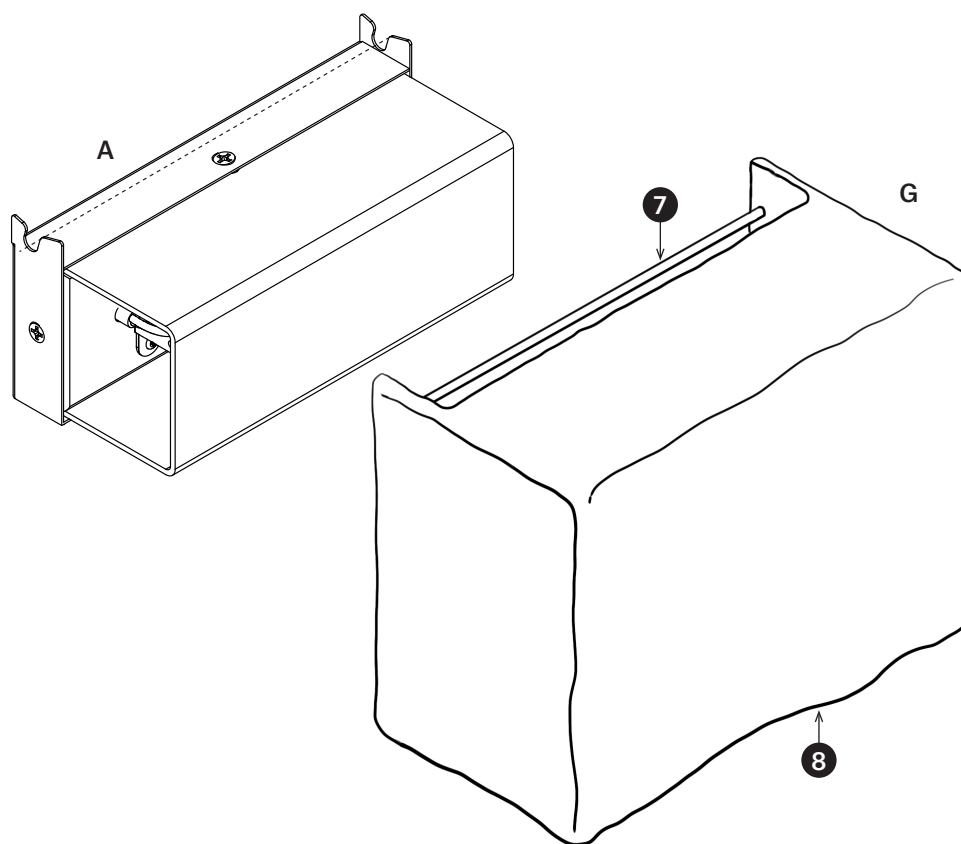
stem.

(Fig. 3)

STEP 5
Insert the Diffuser

Slide the diffuser (F) into the space between the back plate (A) and the top canopy casing (B).

STEP 6
Secure the Diffuser

Tighten the canopy screw (D) to secure the diffuser (F) in place.

stem.

(Fig. 4)

STEP 7
Install the Light

Take the metal light shade and slide the rod into the back plate.

STEP 8
Clean the surface

Use a dry cloth to gently wipe the metal surface and remove any fingerprint marks.

stem.

In case you require further
assistance, please write to us at
info@stemdesign.co.

stem.